


Behaviour of Blast-Induced Damaged Zone Around Underground Excavations in Hard Rock Mass

Problem statement

- Blast-induced damaged zone can affect the affect stability and performance of tunnel. But, we don't know how?
- Consideration of the blast-induced damaged zone has also been a source of additional cost.

Objectives








- Investigate the mechanical behaviour of blast-induced damaged rock.
- Identify important parameters that affect its behaviour
- Identify scenarios where the presence of the blast-induced rock can have significant impact on the construction and performance of a tunnel.

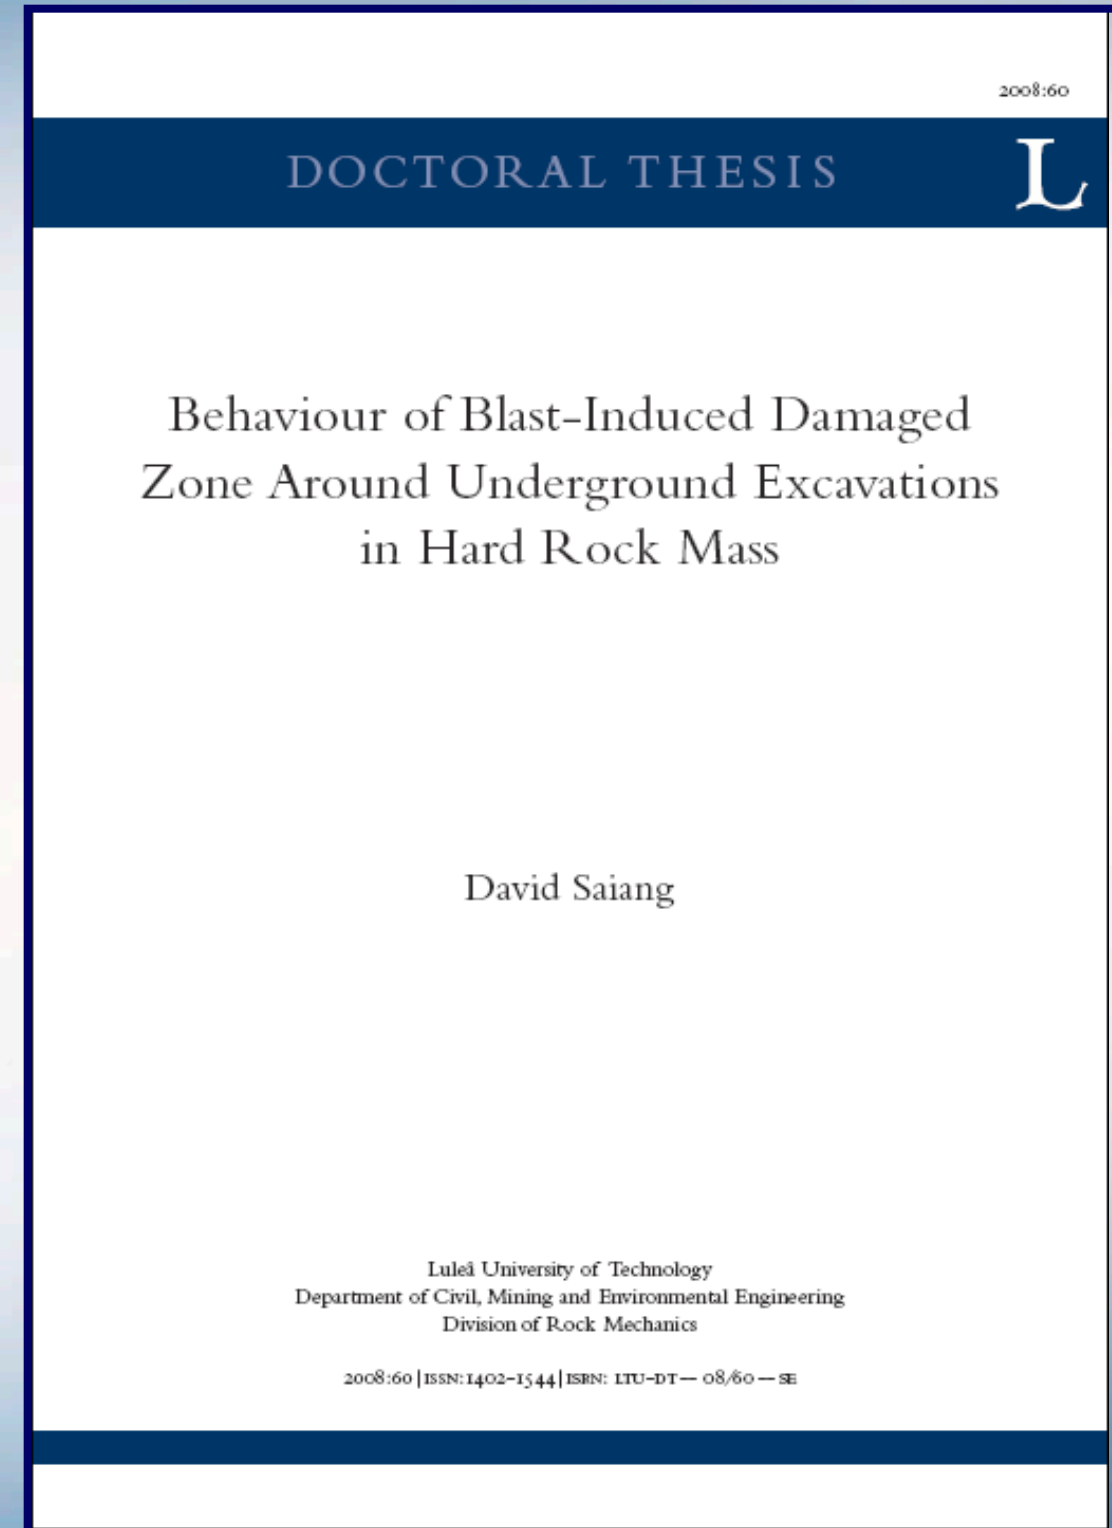

5th Annual Bergforsk Meeting, Luleå, May 5 2009



The Blast-Induced Damaged Zone (BIDZ)

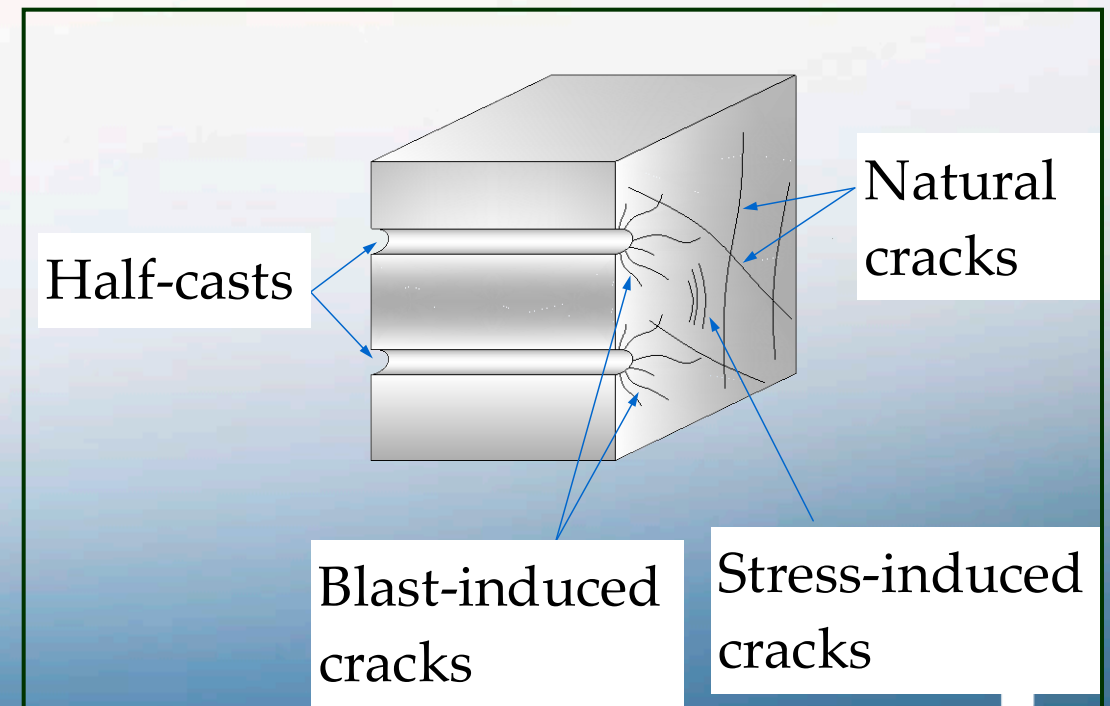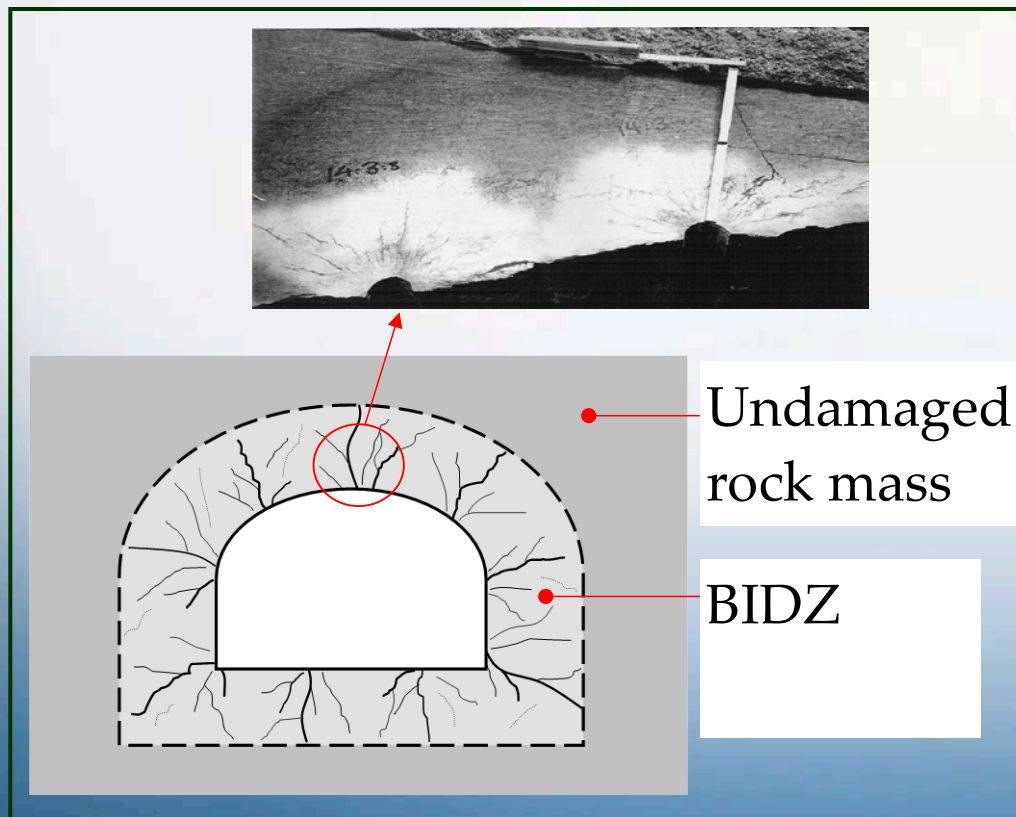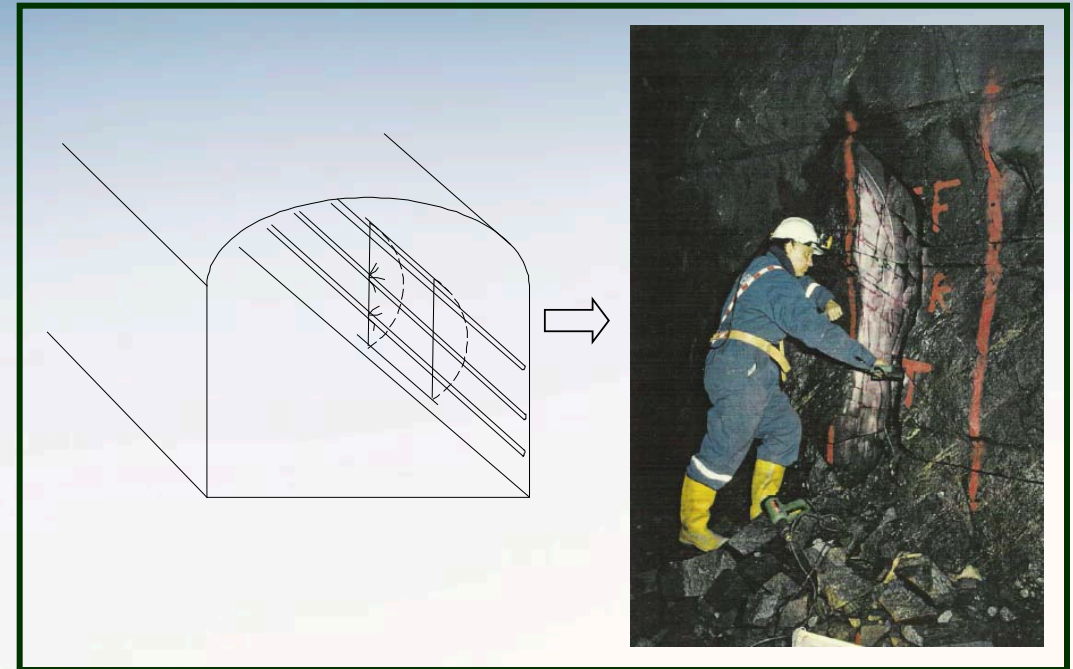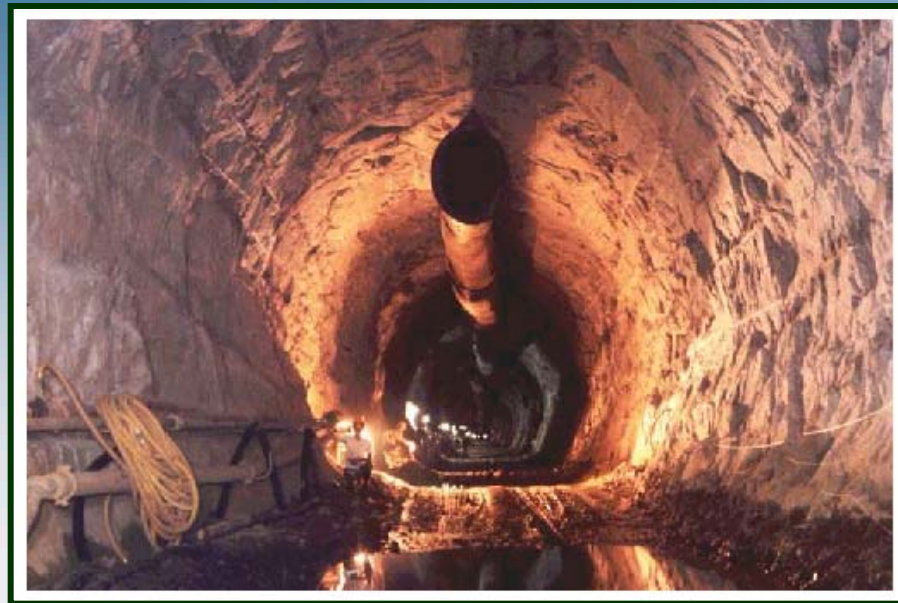

Investigations


- Field Investigation – Kiirunavaara Underground Mine (1 paper)
 - Extent of the damaged zone
 - Modulus of the damaged zone
- Numerical Study – Continuum and Coupled Continuum-Discontinuum techniques (5 papers)
 - Parameter study
 - Behaviour of damaged zone at shallow and deep excavations
 - Failure mechanisms within the damaged zone
 - A method estimating for the strength parameters of the damaged zone

Key Results




- BIDZ Investigation at Kiirunavaara mine
 - BIDZ extended 0.5 to 1.0 m
 - Modulus reduced by 10 to 30%
- Numerical study of BIDZ behaviour
 - Induced stresses were reduced by 50% on the boundary.
 - Maximum displacement increased by 10%.
 - Important parameters of damaged zone in order of significance are; stiffness, tensile strength and compressive strength.
 - Tensile strength of the damaged zone is important at shallow depth excavations, while shear strength deep excavation
 - Failure depth estimated to be between 0.05 to 1.2 m

Behaviour of BIDZ using coupled FLAC-PFC^{2D} model


FLAC-PFC^{2D} coupled model

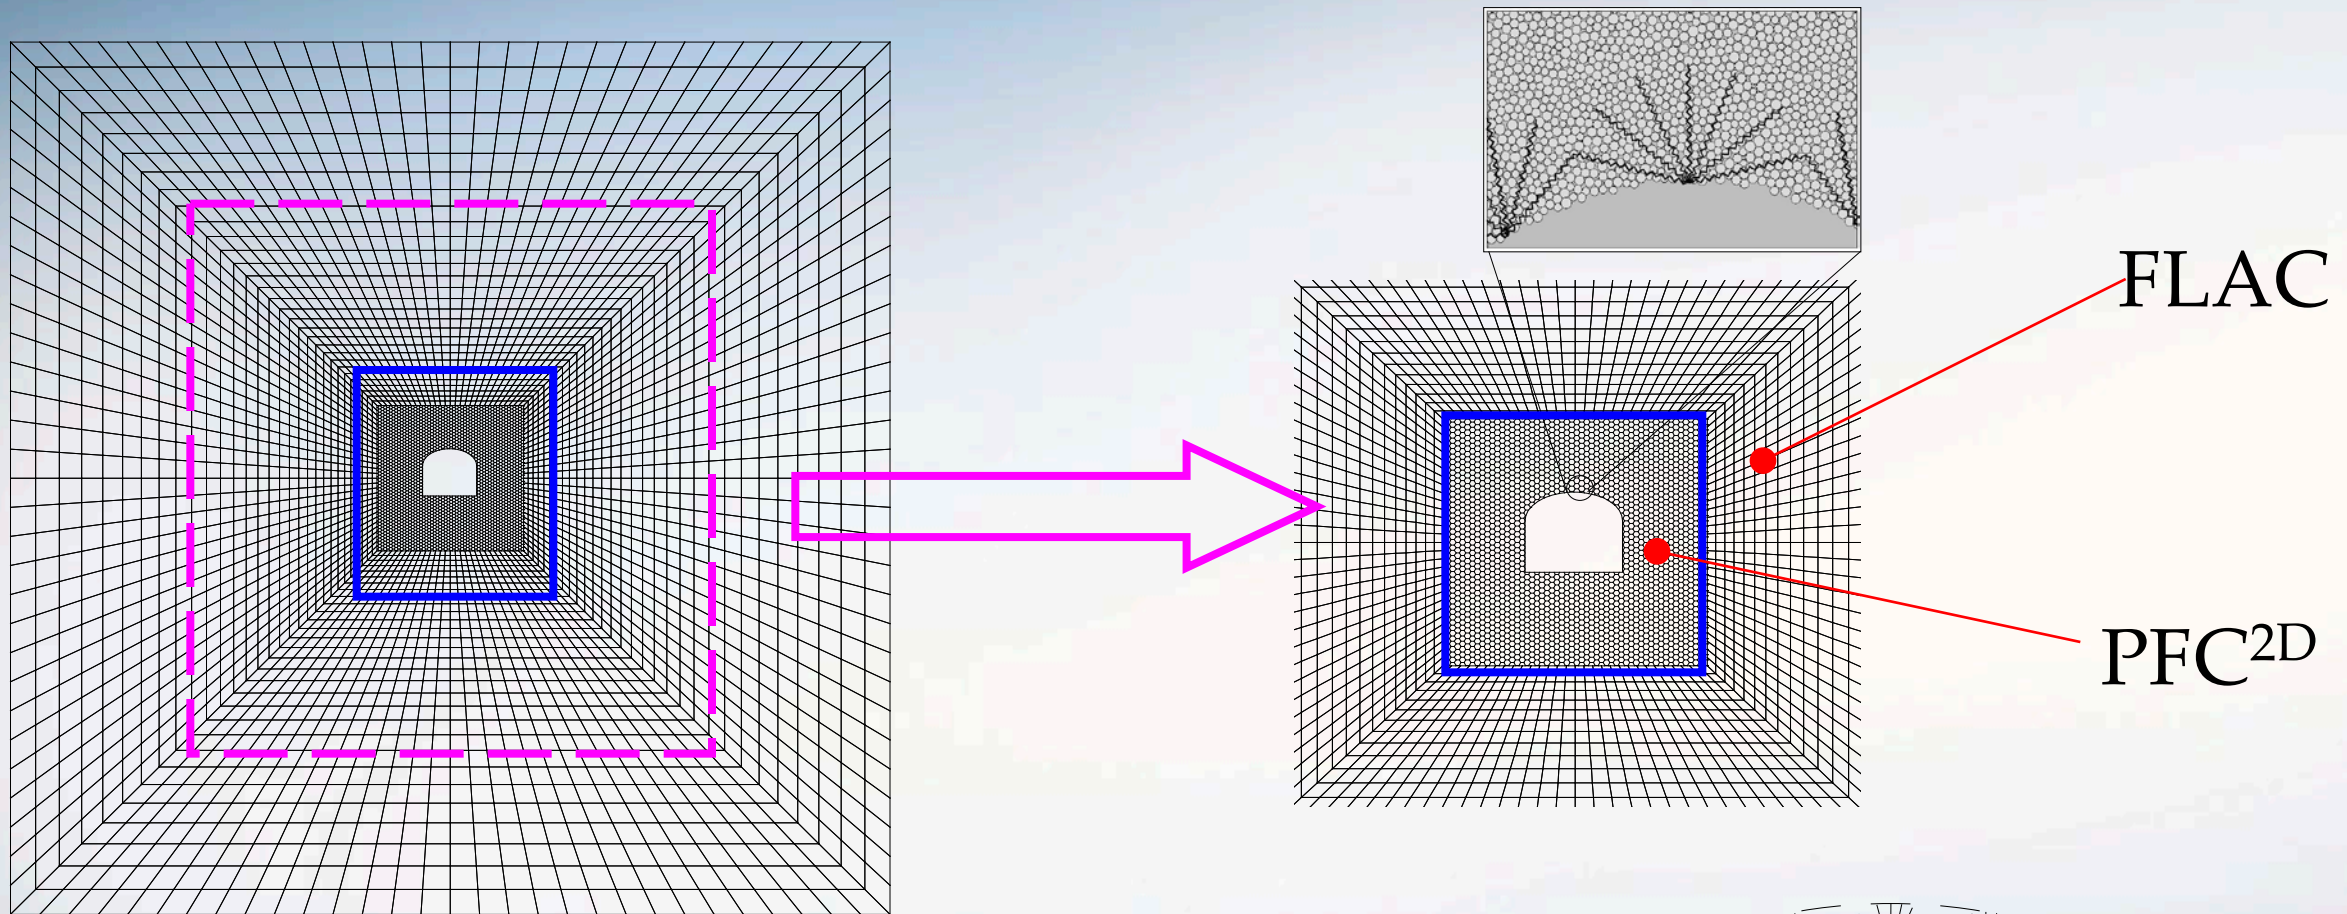

Blast-holes

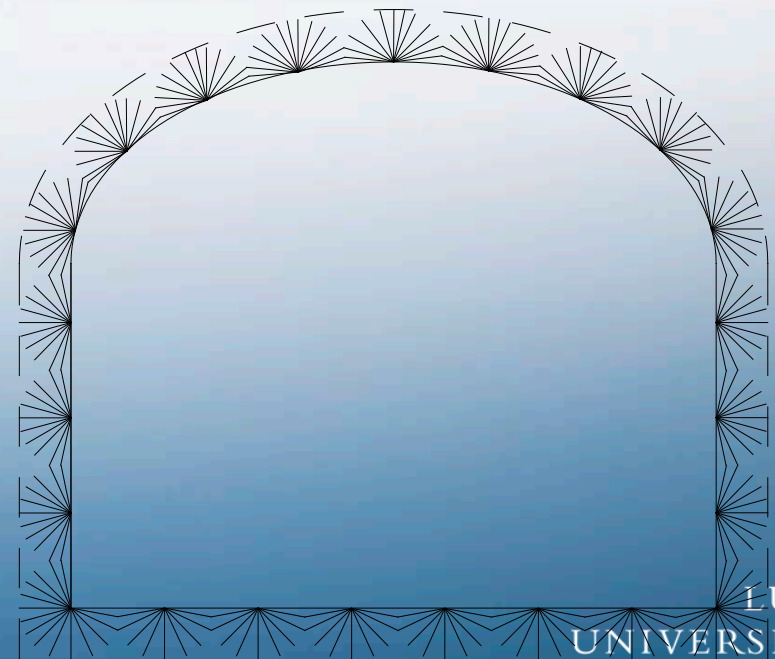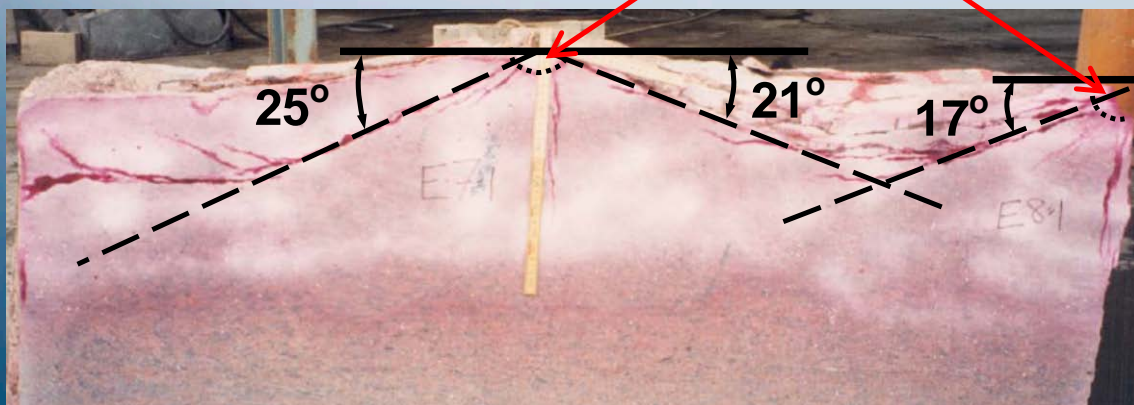

Inputs derived through PFC^{2D} modelling

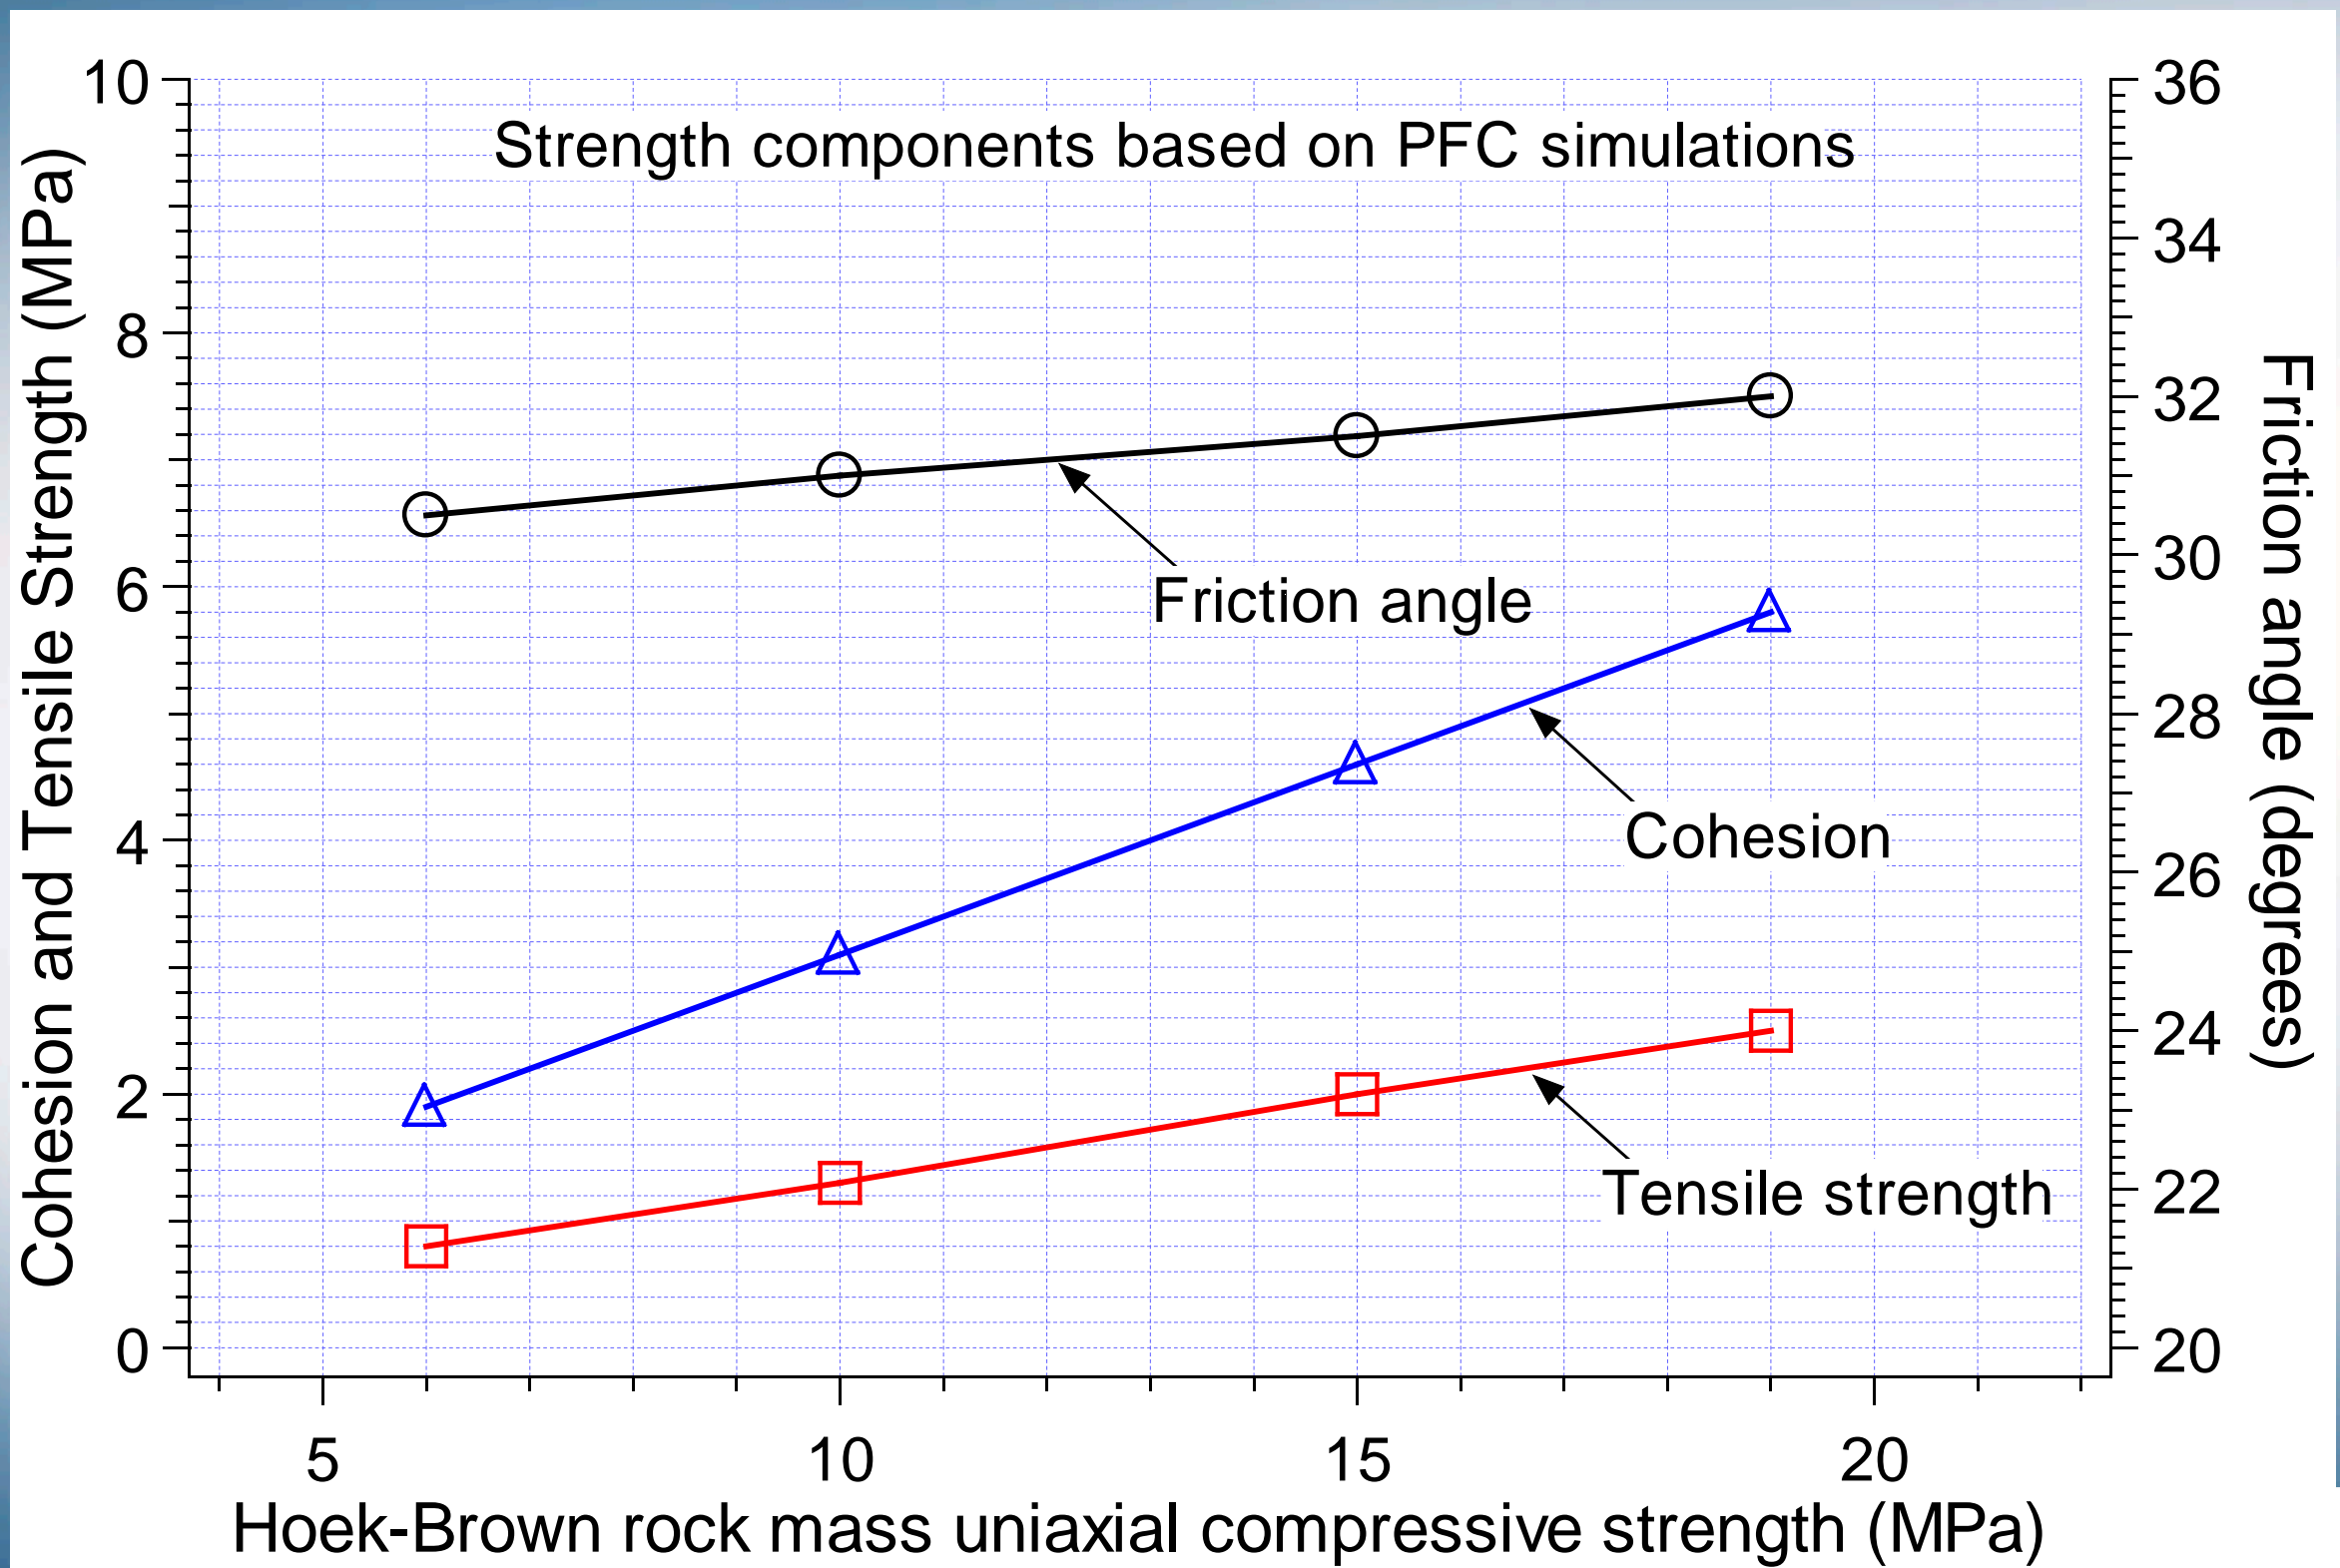

MAIN CONCLUSIONS

Behaviour of the BIDZ

- The thickness of the BIDZ ranges between 0.1 m and 1.0 m in many practical cases, with an average between 0.3 and 0.5 m.
- The modulus within the BIDZ can be reduced by 10 to 50%.
- The study did show that the presence of the BIDZ affected the response of the near field rock mass.
- The inherent properties of the BIDZ that affected its behaviour in order of significance are (i) Young's modulus, (ii) tensile strength and (iii) compressive strength.

- Tensile strength of BIDZ is important for shallow excavation.
- At shallow depth the rock pillar directly above a tunnel behaves like a beam. The BIDZ could reduce its thickness, thus risk its failure.
- The effect of BIDZ on tunnel safety must be considered subjectively.

Modelling of the rock mass

- Behaviour of rock mass is influenced by the failure process. Appropriate inputs must be used to capture these processes.
- Estimation of inputs based on HB-GSI empirical method is inadequate. PFC^{2D} can be used instead.
- Chart developed via PFC^{2D} modelling can be used as a tool to estimate inputs for a continuum model.

- Volumetric strain concentration is a better indicator for brittle failure than the usual plasticity indicators.
- Explicitly simulation of the BIDZ using the coupled FLAC-PFC^{2D} model show promising results.
 - depth failure estimated was within those in practical cases
 - changes in failure characteristics due to different mechanisms were also captured.

THANK YOU!

Bergforsk

Supervisors:

Prof. Erling Nordlund

Dr. Ping Zhang

Sponsors:



5th Annual Bergforsk Meeting, Luleå, May 5 2009